



**FACULTY  
OF MATHEMATICS  
AND PHYSICS**  
Charles University

**BACHELOR THESIS**

Pavel Turinský

**Visualizing OSPF topology**

Department of Applied Mathematics

Supervisor of the bachelor thesis: Mgr. Martin Mareš, Ph.D.

Study programme: Computer Science

Study branch: General Computer Science

Prague 2023

[Bound into the introductory part must be the form with signed approval of the thesis topic (a photocopy suffices). This is not a part of the electronic version of the thesis, do not scan!]

I declare that I carried out this bachelor thesis independently, and only with the cited sources, literature and other professional sources. It has not been used to obtain another or the same degree.

I understand that my work relates to the rights and obligations under the Act No. 121/2000 Sb., the Copyright Act, as amended, in particular the fact that the Charles University has the right to conclude a license agreement on the use of this work as a school work pursuant to Section 60 subsection 1 of the Copyright Act.

In ..... date .....

Author's signature

Dedication.

Title: Visualizing OSPF topology

Author: Pavel Turinský

Department: Department of Applied Mathematics

Supervisor: Mgr. Martin Mareš, Ph.D., Department of Applied Mathematics

Abstract: Abstract. [Recommended length around 80–200 words. This is not a copy of your thesis assignment!]

Keywords: key words [usually 3 to 5 key words or phrases]

[This information must be stored as PDF meta-data, too. Please refer to the README file.]

# Contents

<b>Introduction</b>	<b>3</b>
Terminology . . . . .	3
Notation . . . . .	4
Structure of the thesis . . . . .	4
<b>1 Motivation</b>	<b>5</b>
1.1 Existing approaches to network monitoring . . . . .	5
1.1.1 Visualisation of existing data . . . . .	5
1.1.2 Traffic visualisation . . . . .	5
1.1.3 Host monitoring systems . . . . .	5
1.1.4 Integrated system management platforms . . . . .	6
1.1.5 Topolograph . . . . .	6
1.1.6 Summary of existing tools . . . . .	6
1.2 Target group of users . . . . .	6
1.3 Goals of Birdvisu . . . . .	7
<b>2 Analysis</b>	<b>8</b>
2.1 OSPF overview . . . . .	8
2.2 Routing daemon selection . . . . .	10
2.3 BIRD interface . . . . .	10
2.3.1 Retrieving the OSPF state . . . . .	11
2.4 Test network system: Gennet . . . . .	13
2.5 Unusual network states . . . . .	14
2.5.1 Network splits . . . . .	14
2.5.2 Multiple links . . . . .	15
2.5.3 Multiple addresses in a single network . . . . .	15
2.6 Area structure . . . . .	16
<b>3 Design</b>	<b>17</b>
3.1 Recurring and general patterns . . . . .	17
3.2 Data collection: providers and parsing . . . . .	17
3.3 Annotations . . . . .	17
3.4 Visualisation . . . . .	17
<b>4 Usage</b>	<b>18</b>
<b>5 Evaluation</b>	<b>19</b>
<b>Conclusion</b>	<b>20</b>
<b>Bibliography</b>	<b>21</b>
<b>Glossary</b>	<b>23</b>
<b>List of Abbreviations</b>	<b>24</b>

<b>A Attachments</b>	<b>25</b>
A.1 First Attachment . . . . .	25

# Introduction

Network administrators need to be aware of the current state of their networks. While routing protocols like OSPF often need to have complete information about the state of the networks, we did not find an existing project that would visualise this data easily. We have therefore created a rather simple program called Birdvisu, which aims to fill this hole.

Apart from visualising the topology, we provide the user with basic analysis tools like showing the shortest path DAGs for routers. Furthermore, the architecture of Birdvisu will allow enhancing the data from the routing protocol with additional data, e.g. the utilization of particular links.

## Terminology

In this thesis, we use the word *host* to mean a device connected to a network and capable of processing (sending, receiving, forwarding, ...) IP packets.

An *administrator* is a person or a group of people, who provide the routers with configuration and who make sure that the routers (and other infrastructure) functions correctly.

The word *network*, when used as a noun, will always denote a set of hosts, that can exchange packets “directly”, without forwarding, under normal circumstances. While this is somewhat synonymous with the term *network segment*, when the network splits, there may be multiple link-layer segments belonging to the same network.

We say that a router is said to be *incident* to a network when it has an interface into it. For simplicity, we also say that that network is incident to that router (that is, the incidence relation is symmetrical). We say that a router is a *neighbour* of another router, when they are incident to a shared network, and conversely, that two networks are neighbours when they share a router.

We will use the word *network system* (or just *system*) to describe a set of network managed by a single administrator, which is intended to forward packets across it. This can mean the whole autonomous system<sup>1</sup>, but often this is a much smaller part. When we speak about routing using OSPF, a system is only the set of networks that run a single instance of OSPF.

By the term *IP* we mean the Internet Protocol of either version 4 or 6. When it is important to distinguish, we explicitly write *IPv4* or *IPv6*. IP may also denote an IP address, as in “a router has an IP”, but this usage should be clear from the context.

We distinguish between *routing* as the act of finding next hops [glos], and *forwarding*, the act of sending a received packet through an interface according to a *routing table*. (Whether the routing table is distinct from the network-layer forwarding table is an implementation detail.)

A *topology* describes the connections in the network system, i.e. which router is connected to which networks, with what costs etc. We use the term *graph* only when talking about visualisation of the network to distinguish between the real

---

<sup>1</sup>This is where we borrowed the word “system” from.



state and a virtual one. Moreover, in section 2.5 we will see that a topology is in fact not a graph (as understood by graph theory).

We will be using many other networking terms, which we hope are well-known, but for the sake of completeness, we provide a glossary and a list of abbreviations at the end of this thesis.

## Notation

We write filenames and commands in monospace font, like in `rm -rf /bin`. Snippets of code are also written in monospace, but when we speak of a particular class in text, it is only capitalised, as in “The keys of the dictionary are `VertexIDs`”.

For network diagrams, we use the Network topology icons from Cisco[1]. The basic icons are shown on Figure 1.

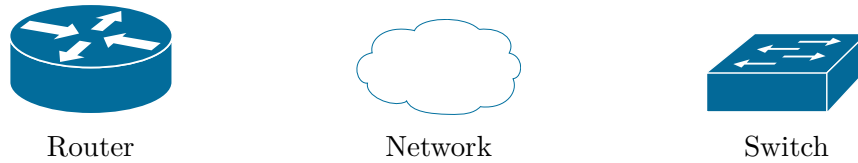


Figure 1: Basic Cisco network icons

## Structure of the thesis

In the first chapter, we explore various approaches of visualising and monitoring a network system. Then, in chapter 2, we understand the behaviour of relevant networking technologies. From that, we derive a design for Bidrvisu in chapter 3. Chapter 4 explains usage of the program. At the end, we demonstrate how the project works in network systems of various sizes.

# 1. Motivation

In this chapter we explore existing solutions for visualising and monitoring network systems and describe the requirements of network administrators. From this we derive a set of properties Birdvisu should fulfil.

## 1.1 Existing approaches to network monitoring

Several approaches to network monitoring and status visualisation already exist. These can be approximately split into several types: visualisation of existing data, traffic visualisation, host monitoring systems and integrated system management platforms. Here we introduce them shortly and explain their potential disadvantages, compared to visualisation of routing data.

### 1.1.1 Visualisation of existing data

Tools in this category do not collect any data on their own, rather only focusing on visualising data from other tools. These projects are often small, can be easy to run and allow visualisation of various data, but they require other infrastructure to provide the data. For example, the Network Weathermap[2] project can be used to provide overview based on data in Cacti or other tools. Grafana[3] provides many different methods of visualising data from various databases.

This does not seem to be usable for visualising OSPF state, because we are not aware of any collectors of OSPF state data.

### 1.1.2 Traffic visualisation

Various software packages can collect and graph utilisation of network links. This often provides information about link state, but requires collection of data on all hosts. Also, in some cases, this might not provide accurate data of the system state, as we will see in section 2.5.1.

These projects usually store a time series of utilisation and therefore need to be deployed on some central server as long-running services.

Examples of this approach include Cacti[4] and Munin[5]. Although both mentioned projects can graph other data, plugins for data collection are available, so this differentiates them from the previous group.

### 1.1.3 Host monitoring systems

Projects in this category do not necessarily consider the whole network system, but check state of individual hosts. It is possible for them to run locally, as is the case for Plotnetcfg[6], or check the host over the network (CaLStats[7], Icinga[8]), but they do not provide overall picture. The capabilities of these tools also differ, from just checking reachability (CaLStats) to being able to retrieve various details from the hosts (Icinga, plotnetcfg).

This approach can also miss some issues with the system, as described in the section 2.5.1.

### 1.1.4 Integrated system management platforms

Some network administrators have created platforms for managing the hosts across the network system. These systems usually know various aspects of the system and may provide features like configuration generation or topology visualisation[9]. However, many of these are tailored for the specific system and are therefore not reusable in other environments.

Also, since large number of people need to access such platforms, they are usually server based with web interface[9].

### 1.1.5 Topolograph

We are aware of the only project that would allow visualisation of OSPF topology, Topolograph[10]. While it does not collect its own data, its companion project, Ospfwatcher[11], is able to retrieve current topology data from a Quagga[12] routing daemon. The deployment involves setting up Logstash[13], so this is only suitable to be run on a server.

Also, we find the interface of Topolograph impractical to use (tested in Firefox version 116.0b2).

### 1.1.6 Summary of existing tools

As we have seen, various projects are available, but they often have some important disadvantage. Table 1.1 summarizes available projects.

Approach	CD	RS	CoH	EoD	T
Only visualisation	×	?	×	?	×
Traffic visualisation	✓	✓	✓	×	×
Host monitoring	✓	?	✓	?	×
Integrated management	✓	✓	?	×	✓
Topolograph + Ospfwatcher	✓	✓	×	×	✓
Ideal state	✓	×	×	✓	✓

Table 1.1: Comparison of current approaches. CD: Can collect data on its own, RS: Requires to be deployed on a server, CoH: Collects data on individual hosts, EoD: Easy to deploy, T: Understands the topology of the system.

## 1.2 Target group of users

Birdvisu aims to be a rather simple tool for small to medium-sized network systems, where it is impractical to deploy complex monitoring and visualisation infrastructure. We want to especially help in homelabs and community wireless networks[glos], but any OSPF deployment should be able to make use of our project.

Also, since we do not require any server apart from a routing daemon, which can be running on any laptop, Birdvisu might also be a helpful tool for admins in the field trying to fix broken infrastructure.

The primary motivation for implementing Birdvisu was the need of the author, who has a dynamically routed system that switches uplinks depending on which currently work.

## 1.3 Goals of Birdvisu

We want Birdvisu to:

- Be a simple tool, easy to run on a regular laptop,
- Leverage the knowledge of topology, which is common in the system, without needing to collect data from other hosts,
- Help administrator quickly recognise issues in the network,
- Allow to be enhanced by other data and to export own data to other projects, in the future.

## 2. Analysis

In order to avoid as many problems as possible when visualising and analysing a OSPF topology, we need to understand several aspects of networking, the OSPF protocol and its implementation in BIRD. However, the aim of this thesis is not to be a complete guide to OSPF nor BIRD, therefore, for the sake of brevity, we skip many details which do not influence our project.

To aid in testing Birdvisu and experimenting with routing, we will also present a small side-project called Gennet in this chapter. Using it, we will understand the behaviour of network splits and multiple links, as seen by the BIRD routing daemon.

### 2.1 OSPF overview

OSPF[14, 15] is a link-state routing protocol, which means that routers try to understand the whole topology of the network and find the best path using an algorithm for finding the shortest paths. Usually, Dijkstra’s algorithm [ref?] is used. OSPF was designed to provide dynamic routing in an entire autonomous system, but running it on a much smaller scale is also possible.

OSPF requires routers to share information about the state of the topology in messages called *Link State Advertisements* (or LSAs for short). The LSAs contain information about which network segments are incident to which router on which interfaces and with which routers it is possible to communicate on those interfaces. To distinguish between routers, each router is assigned a 32-bit number called *Router ID* by the network administrator. Router IDs are usually written in a quad-dotted notation [glos].

The LSAs are flooded throughout the system in order to let all the routers know about the current topology. To avoid overloading the system just with this routing traffic, OSPF devises several mechanisms of minimising the number of exchanged messages. First, each network elects a *designated router* (or DR) which coordinates exchange of the messages in that network segment. Second, the system can be partitioned into *areas*. That way, the frequent LSAs are only flooded throughout a limited set of networks; the *area border routers* (ABRs) send accumulated LSAs into other areas.<sup>1</sup> These LSAs do not describe the topology of the originating area.

The area 0.0.0.0 is called the *backbone area* and all other areas must be incident to it, so that it has all the routing information. When this is impractical, OSPF allows two routers to be connected using a *virtual link*. From the routing perspective, this is a point-to-point connection between the routers in the backbone area. which allows to forward LSAs through other areas even when these LSAs would not normally leave those areas.

There are several types of networks that emerge in OSPF topologies. The *transit* networks are used for forwarding packets in an area. *Stub* networks only have one router and therefore can only deliver packets originating from or destined to that network. For representing routes outside of the area and the

---

<sup>1</sup>These inter-area LSAs are called “Summary LSAs” in OSPFv2, but there is no requirement that the routing information is actually aggregated.

whole system, OSPF recognises *extra-area* and *external* networks respectively. It is also possible for a router to be adjacent to an extra-area router through a point-to-point link. Figure. 2.1 shows the same classification visually.

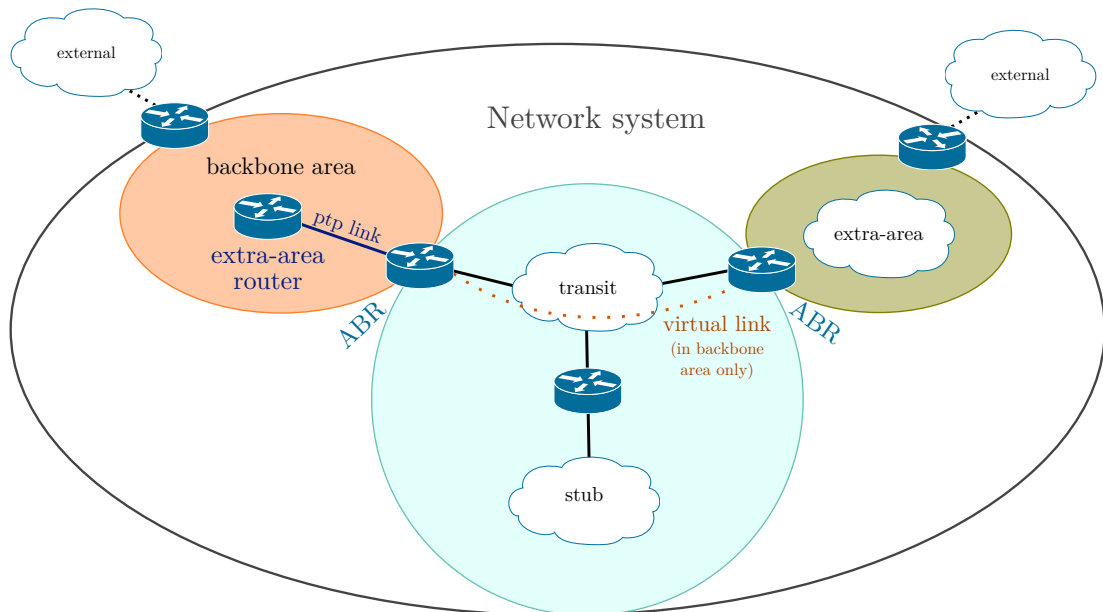


Figure 2.1: Types of networks as seen from the cyan area.

Once the router has complete information about the topology of an area, it constructs a graph representation of the network and calculates the shortest path DAG<sup>2</sup> rooted at that router. This DAG is then used for finding shortest paths to routers and networks in that area, including the external, extra-area and stub networks adjacent to that area. OSPF specifies that the graph has all the networks and routers as vertices, directed edges lead from each router to the incident network with the configured cost and from each transit network to incident routers with cost 0 (except when the two-part metric[16] is implemented). There are no edges starting at the external, extra-area or stub networks, so that the shortest path DAG calculation does not find paths through them.

The cost of the edge to an external network can be of two types. Type 1 cost is specified in the same units as the internal costs, Type 2 cost is larger than any internal or type 1 cost.

The OSPF family of routing protocols has undergone long evolution since the first specification in 1989[17], There are currently two versions of the protocol in use – versions 2 and 3. While the basic idea is still the same, OSPFv2 can only handle IPv4 systems. Although OSPFv3 claims to be network-protocol-independent, it is usually only used with IPv6 systems and in fact, features like virtual links can only be used with that network protocol[18].

Both OSPF versions have numerous extensions, as can be seen by the number of RFCs that update the base specifications[14, 15]. Therefore, we do not implement the protocol ourselves, but rather find a suitable routing daemon [glos] to determine the current topology.

<sup>2</sup>In the specifications, it is called the shortest path *tree*, but there may be multiple shortest paths and the router is supposed to use all of them.

Many improvements of the protocol only affect the topology construction (e.g. NSSA areas[? ]) or change the data exchange between routers (Multi-instance extensions[? ], authentication[? ], ...). By extracting the topology from a routing daemon, we can support many OSPF extensions for free. For this reason, it is mostly sufficient to only consider the base specifications of OSPF.

## 2.2 Routing daemon selection

While we were mostly determined to use BIRD[19] from the start, since we already had some experience with it, let us present here a short summary of other possibilities. Note that the particular choice does not affect interoperability with other routers as long as the chosen routing daemon supports extensions used in the network system.

There are several implementations of both versions of the OSPF protocol. However, many of them are tied to the specific router hardware, which makes it impractical to connect to a graphical visualisation. Moreover, even evaluating the feasibility would require us to obtain the specific hardware. Therefore, we only consider hardware-independent solutions.

While we are aware of several software implementations, many of these do not seem to be developed anymore (Quagga[12], XORP[20], OpenOSPFD[21]). Apart from BIRD, we only found FRRouting[22] to be maintained, meaning that it had a release in the past year. While being maintained is not a strict requirement, it would allow us to use that implementation in case OSPF is extended again.

However, even BIRD does not implement all the extensions, for example, the two-part metric[16].

## 2.3 BIRD interface

The BIRD daemon is controlled through a UNIX domain socket using a text line-based protocol slightly resembling SMTP. The client may send commands to the daemon, which provides responses. The response may be long and possibly formatted into a table. This interface is primarily aimed at human users, so a rather simple client, `birdc`, is provided in the BIRD's package[glos?].

While there is a note of a machine-readable protocol in the `doc/roadmap.md` file in BIRD's source code[23], it is not implemented, so we will need to interface using the socket. This has following consequences, most of which are not very pleasant:

- The responses to different formats often have completely different formats. This necessitates creating a dedicated parsing routines for each kind of command we want to use.
- There is no guarantee that the output will not change between versions. We might need to follow BIRD's development in order to be aware of possible changes.
- The output does not contain all details of BIRD's state. For example, we can not retrieve the shortest path DAG directly from BIRD, nor see the details of the individual LSAs.

- There is no way to get notified when the topology changes.

BIRD provides only a few commands that deal with OSPF:

- `show ospf` shows a simple summary of the running instances of OSPF, like which areas are they in or how many LSAs does BIRD currently consider.
- `show ospf interface` describes a current status of the individual local interfaces: their configuration, designated routers for the incident network, etc.
- `show ospf neighbors` provides details about the state of communication with adjacent routers.
- `show ospf lsadb` returns details about known LSAs. Unfortunately, this contains low-level information like checksums and sequence numbers, but not details about networks or routers.
- `show ospf state` shows an overall view of the ospf graph representation: present routers and networks, costs of links, distances, ...
- `show ospf topology` seems to only provide a subset of the output of `show ospf state`. For example, it does not provide info about any non-transit networks.

Even though some of the commands can have more parameters, parsing the output of the `show ospf state` command is still the only the viable option of getting a topology description. The following subsection describes the syntax of the response to this command.

### 2.3.1 Retrieving the OSPF state

Let us look in depth at the `show ospf state` command, since we will be using it and the format of its output a lot.

The command has two optional parameters. First, the flag `all` may be added to show details not only the reachable part of the system, but from all the known and non-expired LSAs. The difference between the topologies can be used to discover network problems even without configuring the expected state.

The second parameter is a name of the OSPF instance. It is only required when BIRD is running multiple instances simultaneously. This is unfortunately quite common, because in dual-stack[[glos](#)] systems there needs to be a separate instance of OSPF configured for each IP version.

The output of the command is a tree of lines representing the topology itself. Children of a directive are indented by one more tab. An example output is shown in listing 2.1.

The tree as output by BIRD<sup>3</sup> has three levels, we call them top-level, level-2 and level-3. The top level only contains directives of form `area AreaID`, with the AreaID being written in the quad-dotted notation.

---

<sup>3</sup>The format was determined by experimentation and inspecting of `proto/ospf/ospf.c` in BIRD's source code[23].



```

1
2  area 0.0.0.1
3
4      router 203.0.113.1
5          distance 20
6          network 203.0.113.0/26 metric 10
7          xnetwork 203.0.113.64/26 metric 10
8          xrouter 203.0.113.42 metric 10
9
10     router 201.0.113.2
11         distance 0
12         network 203.0.113.0/26 metric 20
13         external 0.0.0.0/0 metric 60
14         stubnet 201.0.113.128/25 metric 200
15
16     network 203.0.113.0/26
17         dr 203.0.113.1
18         distance 20
19         router 201.0.113.1
20         router 201.0.113.2

```

Listing 2.1: Example OSPFv2 state output

On level-2 are mentioned all the routers and networks in the area. This is different for OSPFv2 and OSPFv3. While routers are always mentioned by their router IDs (again, quad-dotted), networks in OSPFv2 dumps are addressed using their IPv4 addresses (CIDR notation), but by the designated router ID and interface number in OSPFv3 ones: `network [203.0.113.1-23]`.

The third level describes details of the respective router/network and all the incident objects. There is always the distance from us (i.e. the router we asked for the dump), or the word `unreachable` if it is not reachable.

There is also a level-3 line for each incident host and network. Overview of the “tags” (the first words) and parameters is provided by table 2.1. Note that networks can only be incident to routers, while routers may be incident to anything. The incidences of routers have also a metric, after the word `metric`, or, in case of Type 2 external cost, `metric2`.

Incidence type	tag	parameter
Transit network	<code>network</code>	Same as on level-2
Router	<code>router</code>	Router ID
Extra-area router	<code>xrouter</code>	Router ID
Extra-area network	<code>xnetwork</code>	IP address (CIDR)
External network	<code>external</code>	IP address (CIDR)
Stub network	<code>stubnet</code>	IP address (CIDR)
Virtual link	<code>vlink</code>	Peer router ID

Table 2.1: Level-3 lines describing incidences

For networks, additional details are also provided on level-3. For OSPFv2, the designated router ID is given in the `dr` directive, similarly, OSPFv3 may provide the networks with zero or more `address` lines with CIDR addresses. An example of a network block in OSPFv3 is in listing 2.2.

```

1     network [198.51.100.1-16]
2         distance 10
3         router 198.51.100.1
4         router 198.51.100.2
5         address 2001:db8:b00:7::/64

```

Listing 2.2: Example OSPFv3 network block

One of the nice properties of BIRD’s output is that whenever there is a level-3 incidence line for object B in a level-2 block of object A, there exists an edge from A to B in the topology used by the Dijkstra’s algorithm. This fact will later simplify parsing.

## 2.4 Test network system: Gennet

To help test Birdvisu and understand network behaviour, we created a simple set of scripts called Gennet. Since it was mainly written to aid Birdvisu, we provide it as attachment ?? of this thesis.

Gennet is a network generator. Using a hard-coded configuration and a set of Jinja2[24] templates, it provides a semi-automatic way of creating several virtual machines (their disk images and startup scripts) and configuration to connect them using software bridges[term?]. This will allow changing the state from the host operating system, simulating various network conditions.

We fully admit that Gennet is really just a quick hack. However, since it was created specifically to aid the development of Birdvisu and because it provides a reproducible environment, we think it makes sense to attach it to this thesis. The particular choice of technologies (Jinja2, Python, Bash, QEMU and Alpine Linux)[refs!] is driven solely by our previous experience with them and should not affect the behaviour of the generated system in any way.

Using Gennet generally involves creating a base disk image and configuration for individual machines, embedding this configuration into the base image, configuring the bridges and finally starting the required machines. The process is explained in detail in Gennet’s README.md file.

When used without changing Gennet’s configuration, it creates a topology of 10 routers (A–I, X) and 7 networks (numbered), as shown in figure 2.2. We expect the user to provide some network connectivity to network 7 and configure the machine X manually. We use this exact topology as a base for our experimentation.

The default Gennet assigns addresses as follows: The networks are given addresses  $172.23.n.0/24$  and  $fdce:73a4:b00:n::/64$ , where  $n$  is the number of the network. Routers are assigned router IDs of  $172.23.100.r$ , where  $r$  is the lexicographic order of that router (A gets a 1, B is 2, ..., I becomes 9, X is 10). The IP addresses of the routers have the same number in the last octet (e.g., the IPv6 of router X in network 6 is  $fdce:73a4:b00:6::a$ ), and all routers have an IP address in each incident network. The costs of all links are 10 by default.

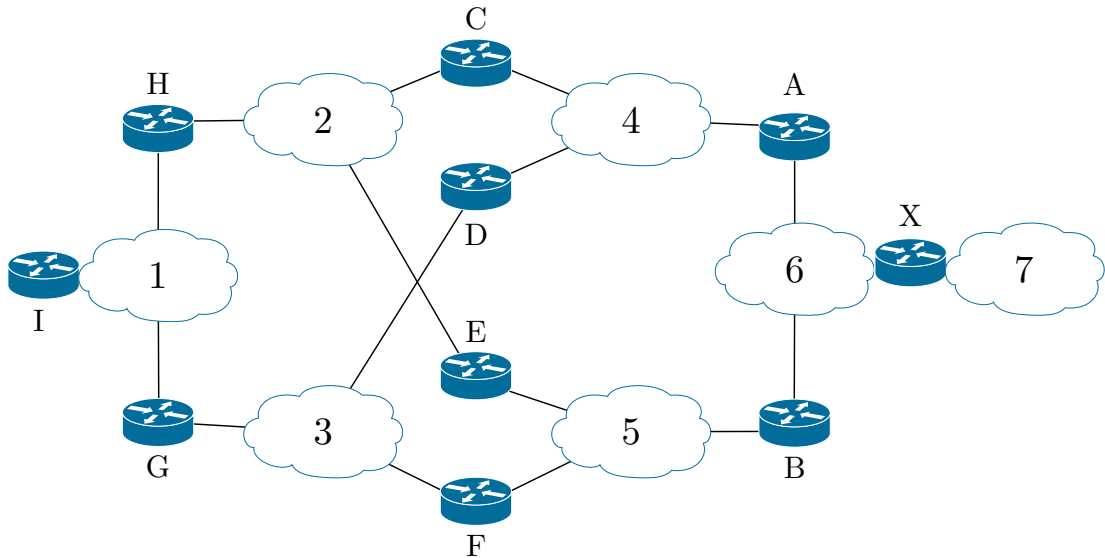


Figure 2.2: The topology of the default Gennet

## 2.5 Unusual network states

Now that we have basic understanding of BIRD and a network system for testing, we see how both versions of OSPF react to various unusual conditions in the system.

We focus on behaviour of BIRD in following scenarios:

- Network split: Hosts in the same network stop being able to communicate with some other host in the same network. This is often caused by a broken cable or switch malfunction.
- Multiple links to same networks: It might make sense to connect a single router to the same network using multiple links, possibly with different costs. This provides redundancy and helps e.g. avoid network splits.
- Network with multiple addresses: Sometimes, a network may have more than one address (prefix). This may be either intentional or a result of accidental joining of networks which should be separate.

Unfortunately, the behaviour of BIRD in these states is often very different depending on the version of OSPF.

### 2.5.1 Network splits

Network splits are of particular interest to administrators. Not only are they symptoms of a broken part of the infrastructure, but also every netsplit inherently means that some addresses from the split network can not be reached by some hosts, because there is no hint, to which segment a packet should be delivered.

Splits can also be tricky to spot from systems using topology-unaware approaches, because if a link connecting two switches fails, all ports on hosts are still up and the traffic in the split network might not change, when no traffic is routed through the broken link.

When a split occurs, at least one segment stops being able to communicate with the network's designated router. Either this segment has only one router and becomes stub, or has more routers and then a new designated router is elected. (OSPF cannot detect when a network splits and there is no router in a separated segment. Monitoring of host reachability is therefore still useful.)

The representation of split network in BIRD's output is straightforward: some routers may become attached to a `stubnet`, instead of a `network` and more level-2 network blocks can appear, one for each segment that has elected a DR.

For OSPFv3, this forms a valid topology, since the level-3 network directives are derived from the designated router ID and its interface number, identifying the network uniquely. However, since OSPFv2 identifies a network using the shared address in the output, it is not immediately obvious, which of the segments the router is connected to. Luckily, this can be deduced from level-2 network blocks, because they provide information both about the segment's DR and about incident routers.

*Consequence:* A network address is not sufficient to identify a network or stubnet. To do that, we either need to also know a designated router ID, in case of transit networks, or which router the network is connected to, for stubnets.

## 2.5.2 Multiple links

BIRD's implementation<sup>4</sup> of both versions of OSPF seems to announce two copies of the same network throughout the area, if the designated router is connected to that network using multiple links. This is not an issue for routing, because using any of the copies results in the packet being sent to the right network, but is an unfortunate behaviour for visualisation. In the OSPFv2 dumps there is no way to differentiate the two copies, since the DR's interface number is not exposed, so we can only merge them into one network, solving the problem.

On the other hand, in OSPFv3 the interface number may be the only information used to differentiate different networks, since the networks do not need to have any addresses assigned. The only safe way is therefore to visualise both copies just in case.

(There also seems to be a bug, when OSPFv3 dump does not contain the level-2 block of the multiply-connected router on a neighbouring router. We did not explain this behaviour, but it does not seem to propagate to other routers nor affect packet forwarding, so we decided to ignore this peculiarity and debug it later. A simple workaround is to add another router between the actual network and Birdvisu, which is always possible by using unnumbered networks.)

## 2.5.3 Multiple addresses in a single network

In OSPFv3, a single network can be assigned zero or more addresses. Therefore, from its point of view it is not an unusual state. *Consequence:* For OSPFv3, the set of all addresses must be considered to determine whether the network has changed or not.

OSPFv2 treats each of the address as a separate network, ignoring other routers. When this is intended, it should not cause problems, and unintended

---

<sup>4</sup>We are not sure whether this is the correct behaviour

merges of networks will not interact. However, we cannot detect this state across the area, unless there is another change in topology (for example, if this is caused by a cable connected to a wrong port, the network will probably be stub).

## 2.6 Area structure

It is also worth to consider the expected size and structure of an OSPF areas where Birdvisu might run. While it is up to the administrator and they may be very creative, there are some limits to such creativity.

The largest system which can be spanned by a single OSPF instance is the whole autonomous system (AS). The largest ASes only have about several hundred thousand routers[25]. The average degree also seems to be rather low.

We can derive another limit from IPv4 address allocations. A /8 block (i.e. Class A) has 16 777 216 addresses. Very few ISP would be assigned such a large block, but they might be using the 10.0.0.0/8 private block. Even if an ISP wants to use all those addresses, majority of them will likely not be assigned to routers, but to some end devices that actually provide “useful” services. Those devices are also likely to be grouped into non-trivial networks, thus reducing the number of vertices (i.e. routers and networks) in the OSPF topology. (While IPv6 allocates many more addresses, we assume that the overall topology will not be different from the IPv4 one.)

It is probably not practical to have a single OSPF area span all the routers in a large AS, since any link state change results in an LSA being flooded throughout the area.

While we cannot be sure about particular administrative decisions, given the observations above, we expect that a single area contains at most few thousand vertices and probably much less than that.

## 3. Design

We now explain the design of Birdvisu in depth. First, we explain some important decisions and present the overall structure of the project, then we look into individual parts of the program.

Birdvisu is implemented in Python, using PySide6, the official bindings for Qt6, for drawing on screen. We decided to use Qt, because it provides a lot of pre-made widgets and tools and since it is widely used, it is easy to find help for it on the Internet. The decision to use Python was not hard either. Not only Qt has official bindings for it, but we use the language very often and thus are comfortable writing in it. We do not expect the potential slowness of Python to be an issue, because for handling graphics we are using Qt, which is written in C++. Also, as we have analysed in section 2.6, we expect the topologies to be quite small.

The project comprises of three main parts: data collection, annotation and presentation part. The data collection part is tasked with finding out the current topology and creating a usable representation of such topologies and their combinations. In the annotation part, we add additional information to the topologies like the difference from the expectation or graph properties of the topology. Finally, when we have all the needed information, we draw the topology on the screen, highlighting the relevant information.

### 3.1 Recurring and general patterns

[dictionaries everywhere, hashable recipes. ospfile with comments as a reusable format. Format of VertexID]

### 3.2 Data collection: providers and parsing

[sub-parts, why a topology is not a graph, stacking topologies with multiedges, fake-freezing, why is everything static. Graph representation, selection of BIRD's instance]

### 3.3 Annotations

[scoping, annotator creation, advantages of storing data in annotations and not vertices. Annotator protocol and possibility of export. Various uses of annotators: enhancing, analysis, visualisation]

### 3.4 Visualisation

[Layouting (nonexistent), why not graphviz, why not consensual metrics, how we are re-using annotations internally. Saving layouts]

## 4. Usage

## 5. Evaluation



# Conclusion

# Bibliography

- [1] Cisco Systems Inc. Network Topology Icons. Available at <https://www.cisco.com/c/en/us/about/brand-center/network-topology-icons.html>. Accessed: 2023-07-17.
- [2] Howard Jones. Network Weathermap. Available at <https://www.network-weathermap.com/>. Accessed: 2023-07-17.
- [3] Grafana Labs. Grafana. Available at <https://grafana.com/grafana/>. Accessed: 2023-07-17.
- [4] Inc. The Cacti Group. Cacti – the complete RRDTool-based graphing solution. Available at <https://www.cacti.net/>. Accessed: 2023-07-17.
- [5] The Munin project. Munin monitoring. Available at <https://munin-monitoring.org/>. Accessed: 2023-07-17.
- [6] Jiří Benc. plotnetcfg. Available at <https://github.com/jbenc/plotnetcfg>. Accessed: 2023-07-17.
- [7] Jan Krupa. CaLStats: Computer and line statistics. Available at <https://jankrupa.com/projects/calstats/>. Accessed: 2023-07-17.
- [8] Icinga GmbH. Icinga 2. Available at <https://icinga.com/>. Accessed: 2023-07-17.
- [9] Jernej Kos, Mitar Milutinović, and Luka Čehovin. nodewatcher: A substrate for growing your own community network. *Computer Networks*, 93:279–296, December 2015.
- [10] Vadims06. Topolograph. Available at <https://topolograph.com/>. Accessed: 2023-07-17.
- [11] Vadims06. OSPF Topology Watcher. Available at <https://github.com/Vadims06/ospfwatcher>. Accessed: 2023-07-17.
- [12] The Quagga team. Quagga routing suite. Available at <https://www.nongnu.org/quagga/>. Accessed: 2023-07-17.
- [13] Elasticsearch B.V. Logstash. Available at <https://www.elastic.co/logstash/>. Accessed: 2023-07-17.
- [14] John Moy. OSPF Version 2. RFC 2328, April 1998.
- [15] Dennis Ferguson, Acee Lindem, and John Moy. OSPF for IPv6. RFC 5340, July 2008.
- [16] Zhaohui (Jeffrey) Zhang, Lili Wang, and Acee Lindem. OSPF Two-Part Metric. RFC 8042, December 2016.
- [17] John Moy. The OSPF Specification. RFC 1131, October 1989.

- [18] Michael Barnes, Sina Mirtorabi, Rahul Aggarwal, Abhay Roy, and Acee Lindem. Support of Address Families in OSPFv3. RFC 5838, April 2010.
- [19] CZ.NIC Labs. The BIRD Internet Routing Daemon. Available at <https://bird.network.cz>. Accessed: 2023-07-11.
- [20] XORP, Inc. eXtensible Open Router Platform. Available at <http://xorp.org/>. Accessed: 2019-02-15.
- [21] OpenBSD Project. OpenOSPF. Available at <http://www.openbgpd.org/>. Accessed: 2023-07-17.
- [22] FRRouting Project. FRRouting project. Available at <https://frrouting.org/>. Accessed: 2023-07-17.
- [23] CZ.NIC Labs. BIRD source code. Available at <https://gitlab.nic.cz/labs/bird>. Accessed: 2023-07-17.
- [24] Pallets project. Jinja. Available at <https://jinja.palletsprojects.com/en/3.1.x/>. Accessed: 2023-07-17.
- [25] M Abdullah Canbaz, Khalid Bakhshaliyev, and Mehmet Gunes. *Router-Level Topologies of Autonomous Systems*, pages 243–257. February 2018.

# Glossary

[TODO]

# List of Abbreviations

[In mathematical theses, it could be better to move the list of abbreviations to the beginning of the thesis.]

[TODO]

# A. Attachments

[Attachments to the bachelor thesis, if any. Each attachment must be referred to at least once from the text of the thesis. Attachments are numbered.]

[The printed version should preferably contain attachments, which can be read (additional tables and charts, supplementary text, examples of program output, etc.). The electronic version is more suited for attachments which will likely be used in an electronic form rather than read (program source code, data files, interactive charts, etc.). Electronic attachments should be uploaded to SIS and optionally also included in the thesis on a CD/DVD. Allowed file formats are specified in provision of the rector no. 72/2017.]

## A.1 First Attachment